

### Liffix Roundsling



#### Well-proven standard roundsling

Liffix roundslings are manufactured acc. to European Standard 1492-2.

They feature a colour-coded sleeve with woven-in tonnage stripes for easy identification of the correct sling in daily practise.


- Complies with current standard DIN EN 1492-2
- Fool-proof colour-coded acc. to DIN 1492-2
- From 10,000 kg load capacity/WLL outer sleeve orange
- Woven tonnage stripes

Great value for money!



#### Tear-proof label, double-layer sewn

**!** Slings with illegible or missing label have to be discarded. Therefore our fold-out label is double-layer sewn: Thus it is tear-proof and protected against abrasion.

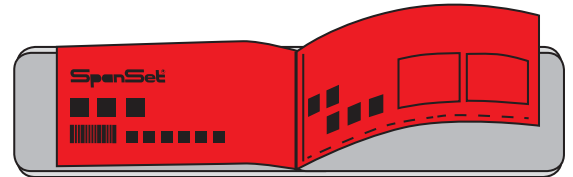

Type	Load capacity single direct in kg	Thickness under load in mm	Width under load in mm	L min in m	L max. in m	Item no.	Length in m					
							1.0	1.5	2.0	3.0	4.0	5.0
Liffix 500	500	3	38	0.38	30	25104500... ...035003	...015115	...015116	...015118	...015119	...015120	
Liffix 1000	1000	5	42	0.38	30	25104500... ...015127	...015131	...015133	...015136	...015137	...015139	
Liffix 2000	2000	7	43	0.38	30	25104500... ...015146	...015147	...015148	...015151	...015153	...015155	
Liffix 3000	3000	7	57	0.38	30	25104500... ...015162	...015165	...015166	...015168	...015170	...015171	
Liffix 4000	4000	8	65	0.38	30	25104500... ...015178	...015179	...015180	...015182	...015183	...015184	
Liffix 5000	5000	9	68	0.75	30	25104500... -	...015191	...015192	...015194	...015196	...015198	
Liffix 6000	6000	10	81	1.00	30	25104500... -	-	...015205	...015207	...015209	...015210	
Liffix 8000	8000	13	84	1.00	30	25104500... -	-	-	...015219	...015223	...015224	