

Gantry Crane type CS-PK



This versatile gantry crane is suitable for in- and outdoor use. Erection is quick and easy. Thanks to the lindapter connection the clearance width is adjustable.



Load capacities between 50 and 5,000 kg and clearance widths between 2 and 6 m are available.

During erection at site the regulations of BGV D6 have to be observed. The following roller types are available:

- Polyamide: can be used for smooth industrial floors and for capacities between 50 and 5,000 kg.
- Solid rubber: can be used for rough, uneven floors and for capacities up to 1,000 kg (over 1,000 kg Vulkollan is much cheaper)
- Vulkollan: can be used on slightly uneven floors (with stones, holes, edges) and for capacities up to 3,200 kg

Scope of delivery:

- Gantry crane without hoist, power feed and clamping buffers
- Painted in RAL 1004 (golden yellow), other colours on request
- Carriage: 4 steerable rollers, 2 of them with stop brake
- Polyamide rollers are standard, other materials on request

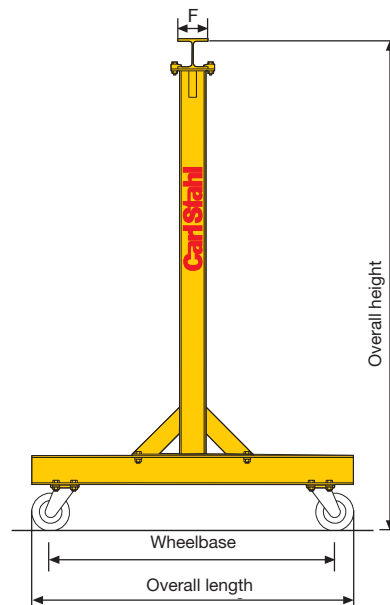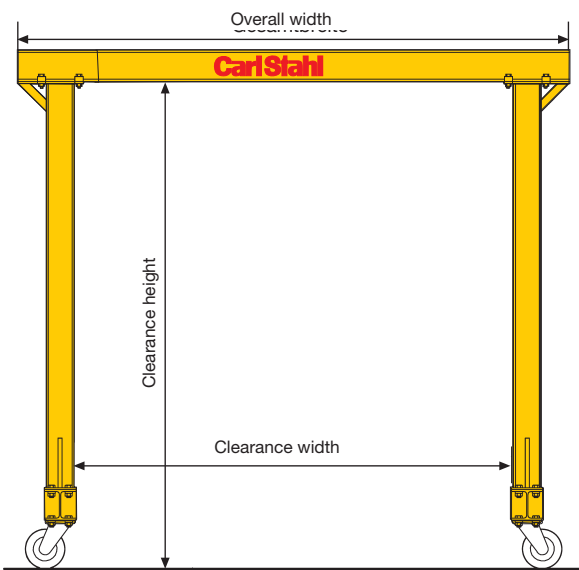

Load capacity in kg	Clearance height in mm	Clearance width in mm	Overall height in mm	Overall length (wheelbase) in mm	Overall width in mm	Weight approx. in kg	Flange width in mm	Item no.
250	3000	3000	3100	1500	3540	220	100	10251500015001
500	3000	3000	3120	1500	3540	245	120	10251500015002
500	3500	4000	3620	2000	4540	265	120	10251500015006
1000	3000	3000	3150	1500	3540	330	160	10251500015003
1000	3500	4000	3660	2000	4540	390	160	10251500015007
2000	3000	3000	3160	1500	3660	390	160	10251500015004
2000	4000	4000	4180	2000	4660	470	180	10251500015008
3000	3000	3000	3180	1500	3660	470	180	10251500015005



We generally deliver the gantry crane systems straight to the customer from the production plant in Velten. We will gladly inform you about the precise shipping and packaging costs on request.

Standard rollers: Polyamide. Alternatively Vulkollan or solid rubber wheels are available. Please contact us for pricing.