

### Pillar Jib Crane made from steel/aluminium type UNILIFT US with electric chain hoist

- For indoor use only
- Delivery EXW

#### Scope of delivery crane:


Steel pillar and aluminium jib arm, Innovative compound anchor system (easy installation without foundation), Electric chain hoist, internal light-running push trolley including buffer, complete electricity, manual slewing, complete crane documentation.

#### Scope of delivery chain hoist:

High-grade electric chain hoist (two-step lifting speed), protection rating IP 55, high-strength tested and galvanised steel chain, chain container, precision hoist, power supply 400 V/50 Hz, control voltage 24 V, control switch with plug connection and strain relief protection rating IP65.

#### Features:

- Classification to EN 13001 HC2 S2 HD2 for light industrial use
- Lockable main power switch, Power-line as festoon system with internal profile sliding blocks
- Power supply 400 V/50 Hz, control voltage 24 V
- Paint build-up for indoor use
- Crane construction shot-blasted
- Tubular column and crane bracket made from steel, painted in RAL 7016 anthracite grey
- Jib made from anodised aluminium hollow profile

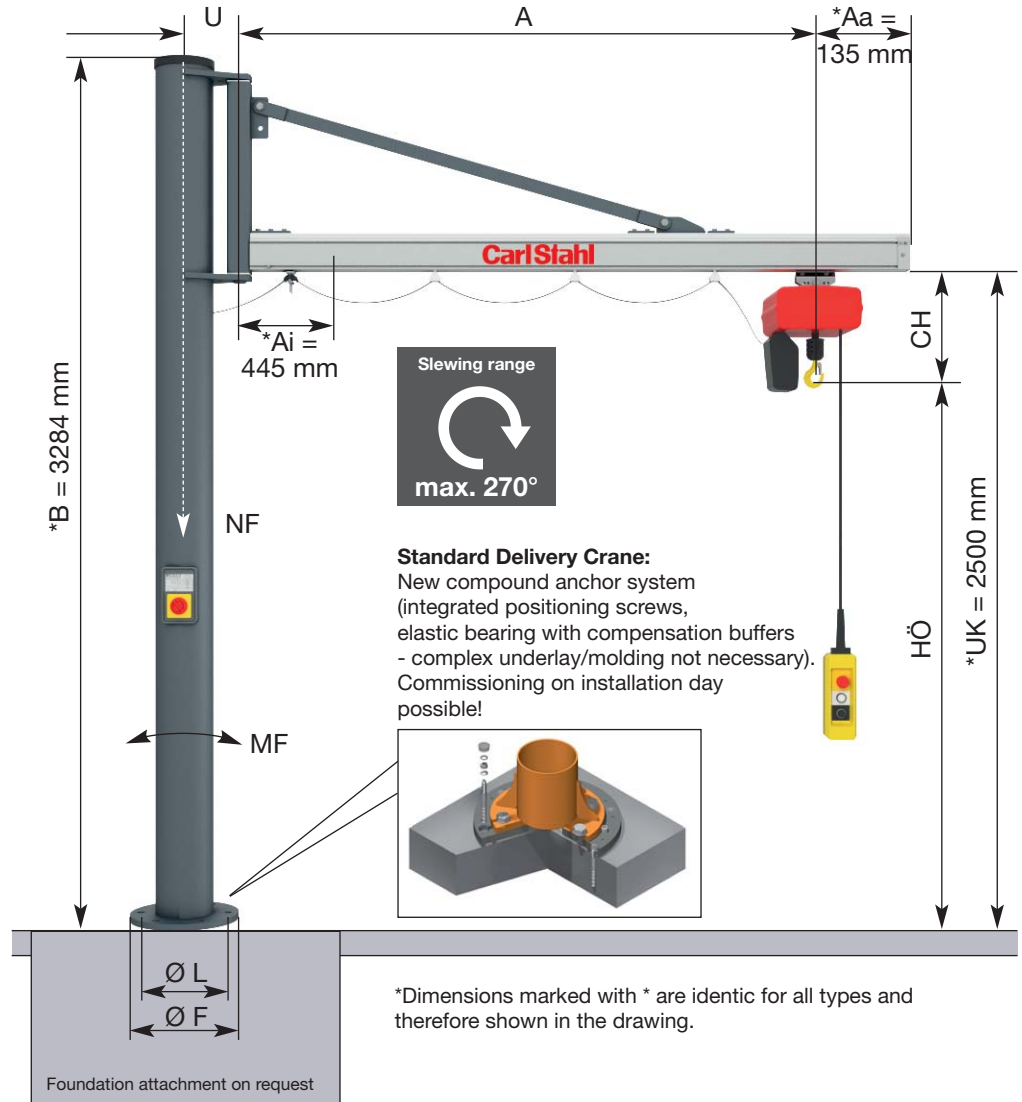

Load capacity in kg	Jib length A in mm	Type/Size	Compound anchor plate Ø	Lifting speed in m/min	Dimensions in mm				MF in kNm	NF in kN	Weight in kg	Item no.
					CH	HÖ	U	Foot flange Ø F L				
125	1910	US 1.25-2.0	530	8/2.0	412	2088	210	340 260	345	3	165	10201500035442
125	2910	US 1.25-3.0	530	8/2.0	412	2088	210	340 260	523	3	174	10201500035443
125	3910	US 1.25-4.0	530	8/2.0	412	2088	210	410 330	773	4	237	10201500035444
125	4910	US 1.25-5.0	530	8/2.0	412	2088	210	410 330	995	4	260	10201500035445
250	1910	US 2.5-2.0	530	6/1.5	412	2088	210	340 260	587	4	165	10201500035446
250	2910	US 2.5-3.0	530	6/1.5	412	2088	210	410 330	1024	5	227	10201500035447
250	3910	US 2.5-4.0	630	6/1.5	412	2088	310	510 430	1408	6	321	10201500035448
250	4910	US 2.5-5.0	630	6/1.5	412	2088	310	510 430	1811	6	346	10201500035449
500	1910	US 5-2.0	530	4.5/1.1	464	2036	210	410 330	1221	8	303	10201500035450
500	2910	US 5-3.0	630	4.5/1.1	464	2036	310	510 430	1867	8	312	10201500035451
500	3910	US 5-4.0	780	4.5/1.1	464	2036	310	510 430	2491	9	414	10201500035452
500	4910	US 5-5.0	780	4.5/1.1	464	2036	310	510 430	3121	10	490	10201500035453
1000	1910	US 10-2.0	630	4/1	563	1937	310	510 430	2486	14	403	10201500035454
1000	2910	US 10-3.0	780	4/1	563	1937	310	510 430	3617	15	486	10201500035455



**Other heights, jib lengths and accessories on request. Subject to technical modifications. All cranes on this page: Receipt of order to shipping EXW within 8 workdays!**