


Heavy Duty Webbing Sling "Powerband PCS", Four-ply

This power-pack is woven out of high-strength PES yarn and sewn in four plies. Thus this webbing sling has a much higher load capacity than one- or two-ply slings of the same width. Therefore PCS slings are perfect for heavy duty applications where slim belts are important e.g. if they have to be pulled under the load of if the only a small contact surface is available.

- Four-ply heavy duty webbing sling
- According to DIN EN 1492-1
- Raised, woven-in WLL indication
- High crosswise stability
- Loop reinforcement
- RFID-Transponder as option


Crane bracket available as option!



Crane bracket



The crane brackets offer additional handling convenience e.g. when connecting to the crane hook or to load suspension equipment. Prices on request.

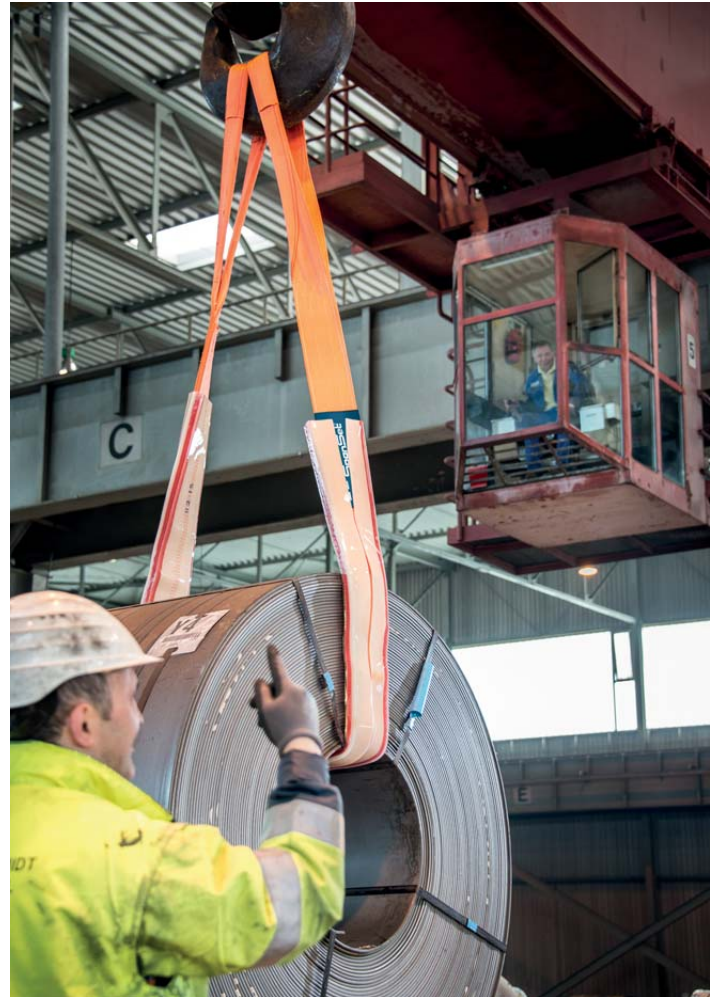

Webbing sling profile in mm	Load capacity single direct in kg	Load capacity basket hitch in kg	Loop size in mm	Type	Item no.	Length L in m					
						2.0	3.0	4.0	5.0	6.0	8.0
30 x 11.2	2000	4000	350	PCS 2000	25103000...	...015078	...015079	...015080	...015081	...015082	...015083
60 x 11.2	4000	8000	400	PCS 4000	25103000...	...015084	...015085	...015086	...015087	...015088	...015089
90 x 12.0	6000	12000	600	PCS 6000	25103000...	...015090	...015091	...015092	...015093	...015094	...015095
120 x 12.4	8000	16000	800	PCS 8000	25103000...	-	...015096	...015097	...015098	...015099	...015100
150 x 12.8	10000	20000	900	PCS 10000	25103000...	-	...015101	...015102	...015103	...015104	...015105
180 x 12.2	12000	24000	1100	PCS 12000	25103000...	-	...015106	...015107	...015108	...015109	...015110
240 x 15.2	16000	32000	1200	PCS 16000	25103000...	-	...015111	...015112	...015113	...015114	...015115
300 x 15.2	20000	40000	1400	PCS 20000	25103000...	-	-	...015116	...015117	...015118	...015119